25X1


Copy No. 1 of 8

MEMORANDON FOR: CIA ELLER STAFF Officer

APR 1 7 1950

EUDJECT

- : Grand Exploitation Equipment for Systems #1, #3 and #4
- REPERENCES: (a) Pager dated 31 January 1996, and just: System #1
 Transcribing and Proceeding Equipment, Medification
 - (b) Nemorandum for CIA E60, dated 23 Murch 1956, Subject: Standard Tape Vidth and Speeds for CIA ELINY Fregren
 - (e) Hemographus for CIA ESO, dated 23 March 1956, subject: Hadification and Addendus to System #1 Transcribing and Processing Equipment
 - (4) Hemorushum for CIA ESO, dated 2 April 1956, same subject as (c) shows
- Systems fl, f3 and fl require ground Amplicating equipment and ground analysis equipment. This paper is a summary of the referenced papers with the addition of recent information on deliveries, quantities desired and expected costs of these equipments.
- 2. The deplicating equipment for Systems #1 and #3 will make four deplicates simultaneously at four times negual speed (a ten-hour operation will be deped in 2g hours). Simultaneously with deping, precision tensecond pulses and approximately one-minute voice associations will be put on the depen. Hemitering outputs are available during the deping and those outputs may be used individually or mixed. The present physical lay-out of the deping equipment is as pictured below:

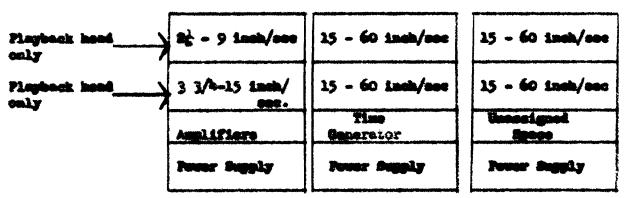

Three six-dust resis

JEYTHOUSE

\$5.3.70

Five of these are needed; one for each Base, one for Barton Ball or TTC and one for the Ranch. The latter will become a spare and be hald in the Washington area after its value at the Banch is realized. Two of these are to be delivered 1 June 1956 with one per month delivered thereafter. (The first two may be deliverable on 15 May if Ampex tage transport deliveries can be expedited.)

- 3. The ground analysis equipment for System \$1 consists of three pieces: (1) a playback unit proper, (2) an event indicator; and (3) a PSF indicator. The playback unit has three heads (playback, erose and record), speeds of 3 3/4 and 15 inches/sec. and menitoring outputs of each channel and any combination of channels simultaneously. This playback unit is also needed for System \$3. Sixteen units have been requested with more expected when HSA requirements are fixed up (four of these sixteen are for HSA). Three are to be delivered by 1 June 1976, four in July, 1976 and four per month thereafter.
- in the smalysis of Systems #1, #3 and #4. On System #1, six of the fourteen channels will be used to show the existence and time (within ten seconds or less) of the occurrence of any event of signal interception or camera shutter action. Thirteen of these have been requested. Their predection schedule is to be the same as that for the playback unit of Paragraph 3 above.
- 5. The PRF indicator will read PRF directly from the tapes on those pulse signals that have fixed repetition rates. Thirteen have been requested. They will be used in Systems fl and fl analysis. He preduction schedule has been set as yet. They are not essential for smalysis, but will add accuracy and time-saving to the analysis process.
- 6. System #3 ground exploitation equipment is identical to that of System #1 (see Paragraphs 2 and 3 above) except for the third piece of the enalysis equipment. A frequency indicator (or calculator) is needed and no PEF indicator is required. The quantities of deping equipments, playback units and event indicators specified above include the requirements for System #3. The frequency indicator converts the pulses on the tapes into digits, which can be then translated into the frequency band (nine bands exist) of the intercept. Hine of these equipments have been requested. Two are to be delivered 1 July 1956. We date has been set for the remaining seven.
- 7. Five System #4 duping equipments have been requested. This equipment is to make two dupes simultaneously at four times normal speed.

1512300

- 3 -

(A ten-hour operation will be duped in 2g hours.) The present physical picture of this equipment is shown below:

Playback head only 3 3/4-71-15-30 inches/sec. Time (Identical to time generator System #1 duping equipment

Two six-foot racks

- 8. The System #4 ground analysis equipment has not yet been firmed up. This can not be done until the System #4 proposal is finalized. It appears, however, that four equipments will be needed: (1) a playback unit for 1" tapes; (2) an event indicator; (3) a PRF indicator; and (4) a related information calculator. Items (2) and (3) will be identical with Item (2) and (3) of the System #1 analysis equipment (see Paragraph 3 above), but additional quantities may be needed. Items (1) and (4) are now pieces of equipment.
- 9. The present estimate of the cost of the items on request is \$650,000. On request are:
 - a. Five System #1 and #3 duping equipments.
 - b. Five System #4 duping equipments.
 - c. Sixteen System #1 and #3 playback units.
 - d. Thirteen Event indicators for Systems \$1, \$3 and \$4.
 - e. Thirteen PRF indicators for Systems #1 and #4.
 - f. Hime frequency indicators for System #3.
 - g. So Mystem A playback units.
 - b. No System A related information calculators.

As a rough estimate, approximately ten each of (g) and (h) will be required and the cost of those ten will perhaps be \$175,000. This is a Sears estimate only and has not been discussed with the auguster.

- 10. Should additional units of any of the above equipments be desired, they can be purchased at the following production costs:
 - a. Systems #1 and #3 duping equipment \$16,758.00*
 - b. System #4 deping equipment \$25,000.00**
 - c. Systems #1 and #3 playback units \$3,800.00*
 - 4. Systems #1, #3 and #4 event indicators \$2,350.00*

060189790

The second of th

```
e. Systems #1 and #5 PEF indicators - $3,936.00°
f. System #3 frequency calculators - $2,498.00°
g. System #4 playback equipment - $7,500.00°
h. System #4 related information indicator - $5,000.00°

* - Producer's Estimate
** - Sears' Estimate

18/JPS:jd (10 April 1956)
Distribution:
Capy 1 - 8A/PC/DCI
2 - Nr. Reber
3 - 280
h - 180 (Prainst Subject)
5 - Frojust Chromo
```

2

989189196